


*The World's Most Trusted Industrial Torque and Tension Systems*

# HYDRAULIC POWER PACKS

HYTORC offers an impressive lineup of high capacity, low-weight 10,000 psi portable pumps designed for continuous/heavy duty operation.

Our hydraulic systems operate at a very quiet 69 dB(A). All pumps are air-cooled and ready to handle heavy workloads. A compact design and simple controls make for short set-up times and, with the automatic option, even faster, easier tightening.

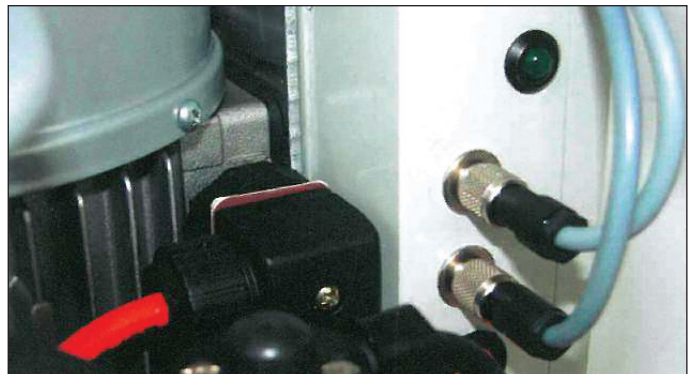

**24 Hour SERVICE**

**800-FOR-HYTORC**

[www.hytorc.com](http://www.hytorc.com)

**HYTORC®**  
Since 1968

333 RT. 17 N. MAHWAH, NJ 07430



JETPRO-S-115/230

Torque-Controlled  
Tightening**FEATURES**

- Two-stage unit
- Class 1.0 analog gauge
- For operating one (1) hydraulic torque wrench
- Voltage 115/230 Volt, 50/60 Hz, 6 Amp
- Dimensions (L x W x H) mm: 380 x 215 x 34 inches: 15 x 8.5 x 13.5
- Weight excluding oil: 15 kg, 33 lbs.
- STANDARD remote control: 24 Volt, cable length 5 m

**OPTIONS**

- Analog/digital gauge, Class 0.25
- Calibrated gauge with certificate
- Remote control cable 10 m or 30 ft.



JET-STREAM 115A-WHS

Torque-Controlled  
Tightening**FEATURES**

- Three-stage unit
- Class 1.0 analog gauge
- Semi-Automatic
- Oil cooler
- For operating up to four (4) hydraulic torque wrenches
- Voltage 115 Volt, 100-115 Volt, 50/60 Hz, 15 amp
- Dimensions (L x W x H) mm: 490 x 280 x 390, inches: 19 x 11 x 15
- Weight excluding oil: 27 kg, 59 lbs.
- STANDARD remote control: 24 Volt, cable length 5 m

**OPTIONS**

- Analog/digital gauge, Class 0.25
- Calibrated gauge with certificate
- Remote control cable 10 m or 30 ft.



BIGJET 18-400

Torque-Controlled  
Tightening**FEATURES**

- Three-stage hydraulic unit
- Class 1.0 analog gauge
- For operating up to four (4) hydraulic torque wrenches
- Oil cooler
- Voltage 400 Volt: 380/460 Volt, 50/60 Hz, 3 ph, 6 Amp
- Dimensions (L x W x H) mm: 485 x 310 x 435, inches: 19 x 12 x 17
- Weight excluding oil: 29 kg, 63 lbs.
- STANDARD remote control: 24 Volt, cable length 5 m or 15 ft.

**OPTIONS**

- Semi-Automatic
- Analog/digital gauge, Class 0.25
- Calibrated gauge with certificate
- Remote control cable 10 m or 30 ft.



JETSTREAM 115/230 TORQUE &amp; ANGLE

Torque-Controlled  
TighteningTorque & Angle-Controlled  
Tightening**FEATURES**

- Three-stage hydraulic unit
- Class 1.0 analog gauge
- Semi-, fully-automatic function
- Oil cooler
- One (1) tool, fully-automatic shutdown when torque/angle is reached
- Shutdown signal: via optical display and sound
- Voltage: 115/230 Volt, 50-60 Hz, 1 ph
- Dimensions (L x W x H) mm: 490 x 280 x 390, inches: 19 x 11 x 15
- Weight excluding oil: 27 kg, 59 lbs.
- Remote control: 24 Volt, cable length 5 m or 15 ft.

**OPTIONS**

- Available w/Documentation System and/or Fully Automatic Operation
- Analog/digital gauge, Class 0.25
- Remote control cable 10 m or 30 ft.
- Calibrated gauge with certificate